


Desire Square Triple 2 Outlet Thermostatic Conecealed Square Valve

Code: MLSHDETR2OSQ

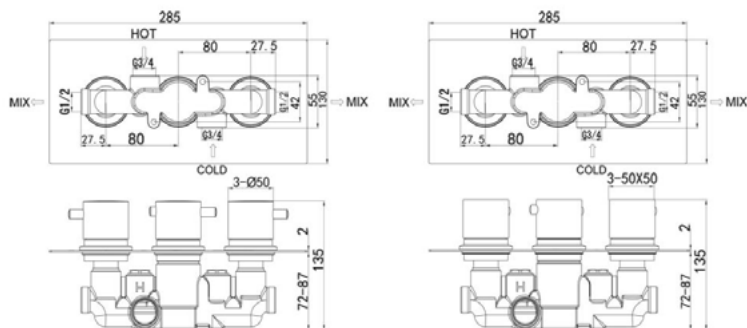

Construction

Finishes

Product Type

Water Pressure

Plumbing Systems

Standards

Cartridge

Fitting

Guarantee

Brass Body (CuZn38Pb18)

Chrome plated to BS EN 248

Contemporary

Min. 0.2 bar, Max. 6.0 bar

Suitable for all plumbing systems, preferably balanced. Min. supply pressure differential requirement is 5:1

Complies with BSEN 1111

Thermostatic

Inlet: 3/4" female thread

Outlet: 1/2" Female thread

10 years against manufacturing faults (3 Years on Serviceable Parts).

Additional Information

1. Temperature: Pre-set 38°C, with push button override to 48°C
2. Automatic shut off in the event of hot or cold water supply failure

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
38°C (L/min)		7.9	-	12.6	20.0			36.0	-	-

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.